


## FUNCTION

- Fabric woven to widths 8.9 cm and 12.7 cm
- Smooth edges for optimal hanging performance for vertical blinds
- Proven acoustic properties

## APPLICATIONS

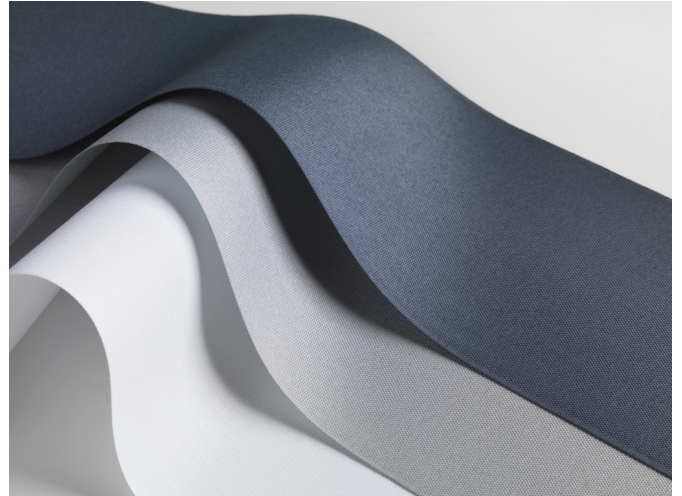

## FABRIC PROPERTIES

 Semi transparent

 Polyester

 275 g/m<sup>2</sup>

 0.47 mm

 8.9 cm, 12.7 cm

## FEATURES / TECHNICAL PROPERTIES

 4-5

 Alpha-w = 0.60

 Flame retardant

 Applicable in humid areas

 Special colours from 5'000 m

## WASHING INSTRUCTIONS



## FLAME RETARDANT

Class 1 (EN 13773)

Class 1 (UNI 9176/77)

Type B (BS 5867-2)



**Function**
**OPTICAL AND SOLAR COEFFICIENTS ( $\pm 5\%$ , DIN EN 410)**

Colour	$T_V$	$T_S$	$R_S$	$A_S$	$T_{UV}$	$F_C$	$g_{tot}$
<b>01</b>	32.3	31.4	63.8	4.8	18.3	0.54	0.39
<b>03</b>	24.2	28.1	62.2	9.7	15.4	0.54	0.39
<b>13</b>	30.5	31.2	65.4	3.4	29.2	0.53	0.38
<b>16</b>	30.1	28.7	56.7	14.6	8.5	0.58	0.42
<b>26</b>	11.5	22.1	43.9	34.0	4.9	0.66	0.47
<b>29</b>	11.8	22.7	50.8	26.5	8.0	0.61	0.44
<b>54</b>	2.8	18.7	37.0	44.3	2.9	0.70	0.50
<b>72</b>	4.1	19.3	38.6	42.1	4.6	0.69	0.50

 $T_V$  Visible light transmission

 $R_S$  Solar reflectance

 $T_{UV}$  UV transmission


 $g_{tot}$  Total g-value

 $T_S$  Solar transmission

 $A_S$  Solar absorption

 $F_C$  Shading factor

 $F_C + g_{tot}$ : Value calculated with glass: 0.72 /  $U_g = 1.6 \text{ W/m}^2 \text{ K}$ , DIN EN 13363-1

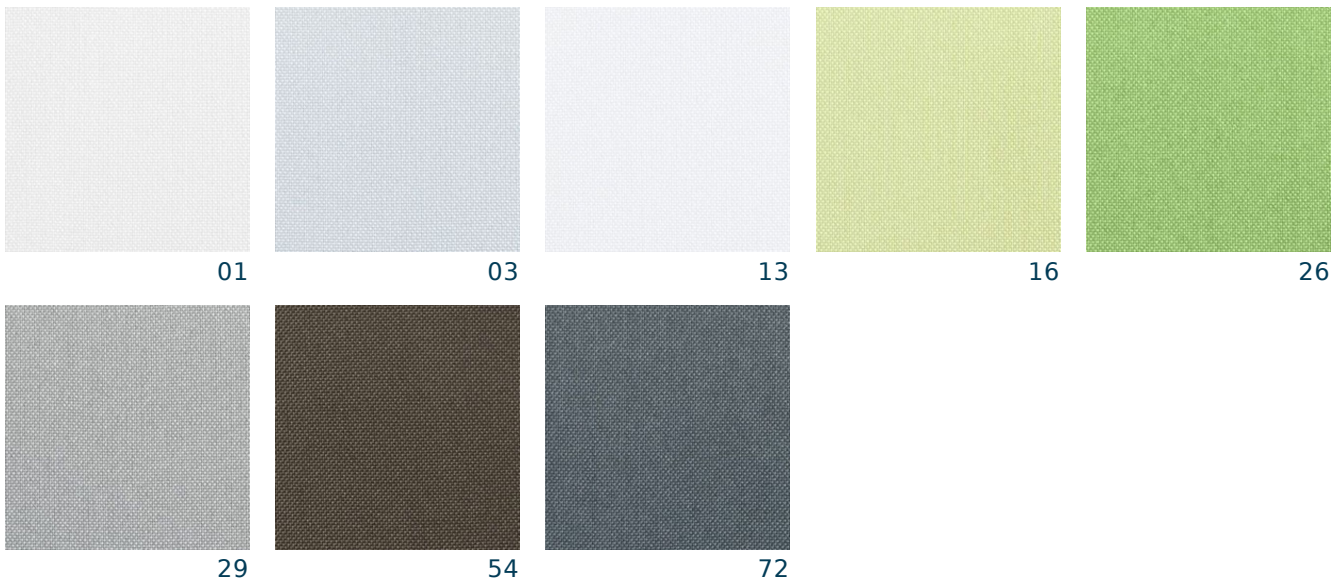**Function**


Colours shown are not binding