

DEEP

- High performing blackout fabric with a light sheen and black reverse
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 60°
- Proven acoustic properties

APPLICATIONS



Not suitable:
SG 4905

FABRIC PROPERTIES

●	Blackout
⌘	Polyester
Ⓜ	325 g/m²
⊥	0.45 mm
← max. →	290 cm
👉	295 cm
👈	295 cm

WASHING INSTRUCTIONS

🌊	30 -1%	60 -1%	⊗	Ⓟ -0.5%	⚡	🧺
📏	30 -1%	⊗	⊗	⚡	🧺	
📏	👉	⊗	⊗	⚡	⊗	

FEATURES / TECHNICAL PROPERTIES

☀	5
👂	Alpha-w = 0.30 / 0.55
🔥	Flame retardant
💧	Applicable in humid areas
📏	Suitable for Wave
📏	Only with lined fabric
🌿	Oeko-Tex
🎨	Special colours from 240 m

FLAME RETARDANT

Class 1 (EN 13773)
Type B (BS 5867-2)
CAN/ULC-S109-14



Deep

OPTICAL AND SOLAR COEFFICIENTS (± 5%, DIN EN 410)

Colour	T _s	R _s	A _s	F _c	g _{tot}
01	0.0	4.1	95.9	0.89	0.64
02	0.0	4.1	95.9	0.89	0.64
03	0.0	4.1	95.9	0.89	0.64
05	0.0	4.1	95.9	0.89	0.64
06	0.0	4.1	95.9	0.89	0.64
07	0.0	3.2	96.8	0.90	0.65
08	0.0	3.2	96.8	0.90	0.65
10	0.0	3.9	96.1	0.89	0.64

T_s Solar transmission

R_s Solar reflectance


A_s Solar absorption

F_c Shading factor

g_{tot} Total g-value

F_c + g_{tot}: Value calculated with glass: 0.72 / Ug = 1.6 W/m² K, DIN EN 13363-1

Deep

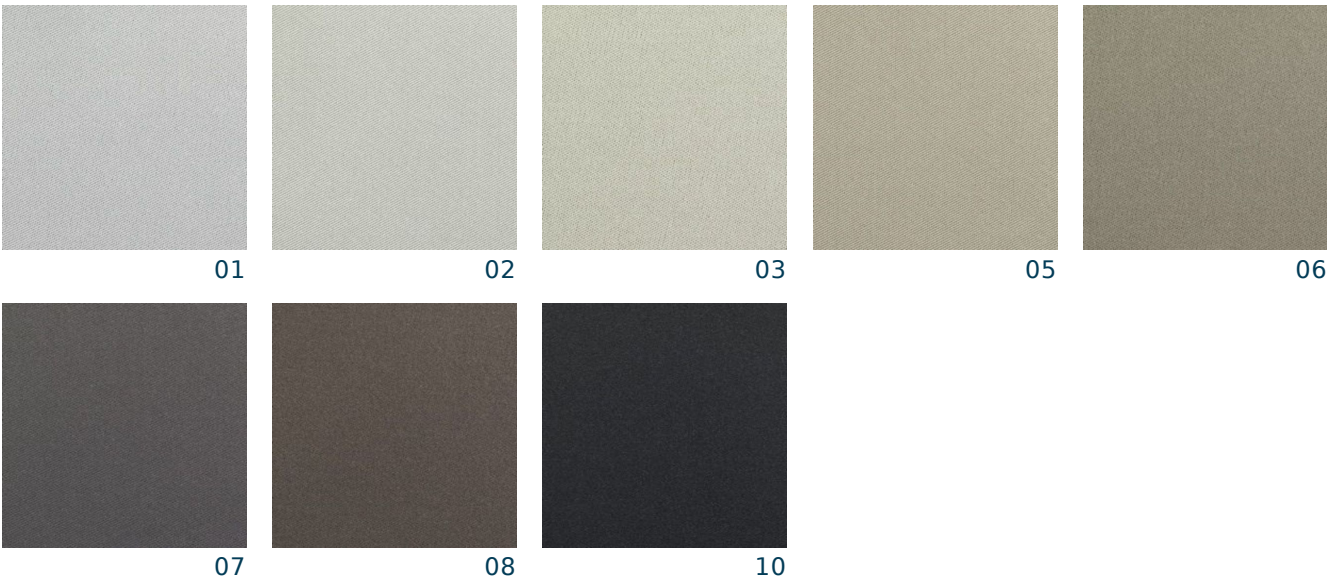

Colours shown are not binding