

PUMA

- Robust blackout fabric with reliable hanging characteristics
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Greenguard® certification for low-emission products

APPLICATIONS



Not suitable: SG 4905,
SG 4900, SG 4907

FABRIC PROPERTIES

●	Blackout
⚡	25% glass fibre, 75% PVC coated
⚖	407 / 530 g/m ²
✂	0.30 / 0.38 mm
← max. →	239 / 295 cm
📏	244 cm, 300 cm

WASHING INSTRUCTIONS



FEATURES / TECHNICAL PROPERTIES

☀	6
🔥	Flame retardant
💧	Applicable in humid areas
🖨	Digital printing
🌿	Oeko-Tex, Greenguard
🎨	Special colours from 1'500 m
i	Weldable

FLAME RETARDANT

Class 1 (CSE RF)
M1 (NF P 92-503/5/7)
Type B (BS 5867-2)



Puma

OPTICAL AND SOLAR COEFFICIENTS (± 5%, DIN EN 410)

Colour	R _s	A _s	F _c	g _{tot}
900	56.0	44.0	0.56	0.40
909	22.0	78.0	0.78	0.56
930	5.0	95.0	0.89	0.64
933	45.0	55.0	0.63	0.45
934	60.0	40.0	0.54	0.39


R_s Solar reflectance

A_s Solar absorption

F_c Shading factor

g_{tot} Total g-value

Fc + gtot: Value calculated with glass: 0.72 / Ug = 1.6 W/m² K, DIN EN 13363-1

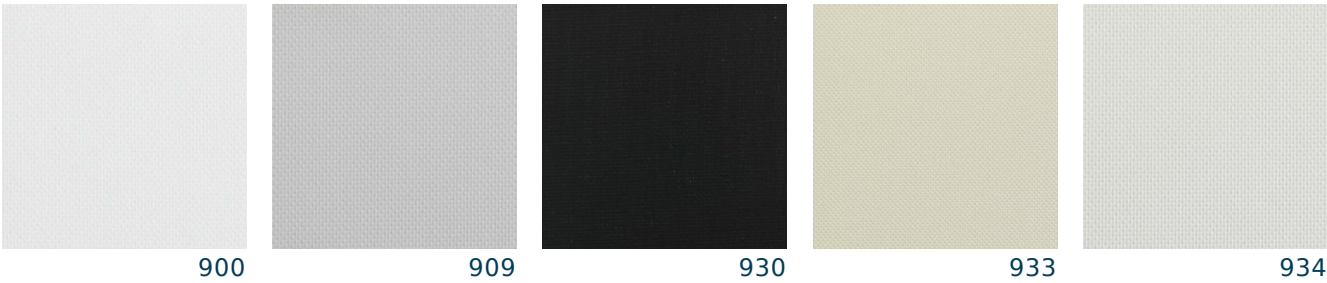

Colours shown are not binding