


DEEP

- High performing blackout fabric with a light sheen and black reverse
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 60°
- Proven acoustic properties





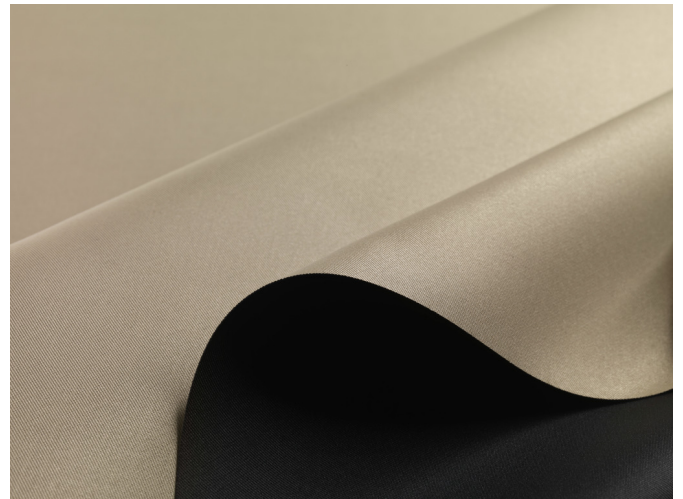


APPLICATIONS



Not suitable:
SG 4905



FABRIC PROPERTIES

	Blackout
	Polyester
	325 g/m ²
	0.45 mm
	290 cm
	295 cm
	295 cm

FEATURES / TECHNICAL PROPERTIES

	5
	Roman blinds: Only with lined fabric
	Alpha-w = 0.30 / 0.55
	Flame retardant
	Applicable in humid areas
	Suitable for Wave
	Oeko-Tex
	Special colours from 240 m

WASHING INSTRUCTIONS

	 -1%	 -1%		 -0.5%		
	 -1%					
						

FLAME RETARDANT

Class 1 (EN 13773)
Type B (BS 5867-2)
CAN/ULC-S109-14



Deep

OPTICAL AND SOLAR COEFFICIENTS ($\pm 5\%$, DIN EN 410)

Colour	T_s	R_s	A_s	F_c	g_{tot}
01	0.0	4.1	95.9	0.89	0.64
02	0.0	4.1	95.9	0.89	0.64
03	0.0	4.1	95.9	0.89	0.64
05	0.0	4.1	95.9	0.89	0.64
06	0.0	4.1	95.9	0.89	0.64
07	0.0	3.2	96.8	0.90	0.65
08	0.0	3.2	96.8	0.90	0.65
10	0.0	3.9	96.1	0.89	0.64

T_s Solar transmission

A_s Solar absorption


g_{tot} Total g-value

R_s Solar reflectance

F_c Shading factor

$F_c + g_{tot}$: Value calculated with glass: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Deep

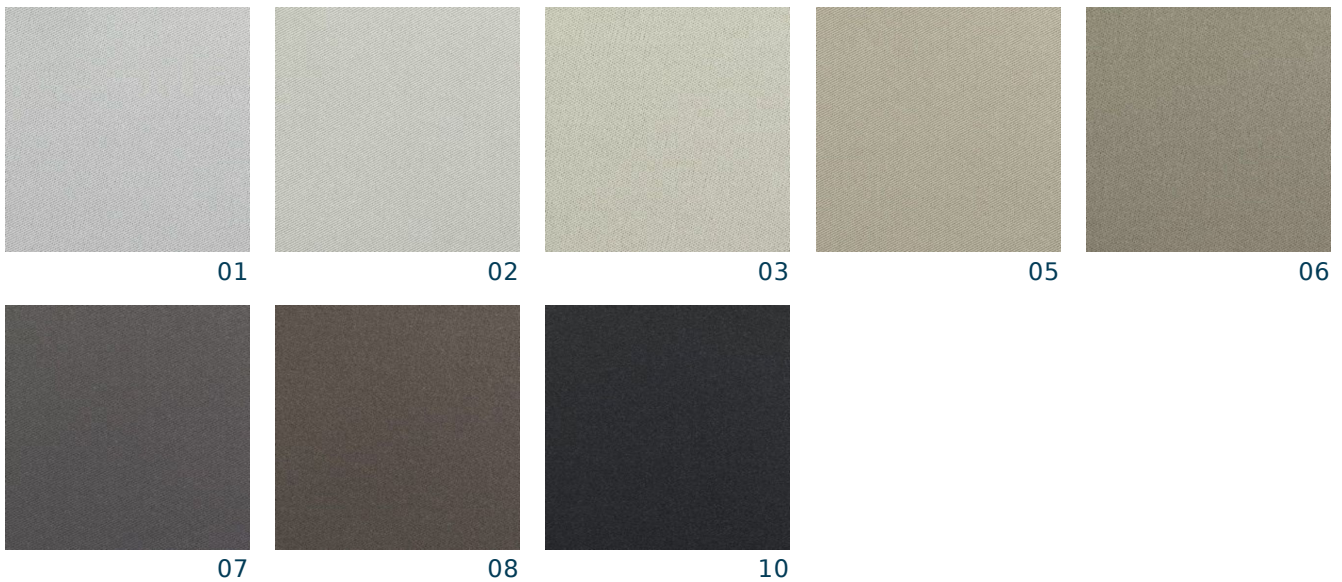

Colours shown are not binding